

Technical Data		Value
Model		TOP 2 - GM
Liquid type		Clean water
Phase		Single-phase
Power	kW	0.37 kW
	HP	0.50 HP
Performance	Q l/min	20 ÷ 220
	H/m	8 ÷ 1
Nozzles	asp	-
	mand	1¼"
Weight		5.4 kg

OPERATING LIMITS

Liquid temperature up to +40 °C (liquid temperature up to +90 °C for intermittent service of up to 3 minutes)

Depth of use below water level

up to 3 m for TOP 1-2-3

up to 5 m for TOP 4-5 (with appropriate cable length)

Passage of suspended solids up to Ø 10 mm

Emptying level


up to 14 mm from the bottom for TOP 1-2-3

up to 30 mm from the bottom for TOP 4-5

Continuous duty S1

CURVE E DATI DI PRESTAZIONE

50 Hz n = 2900 min⁻¹

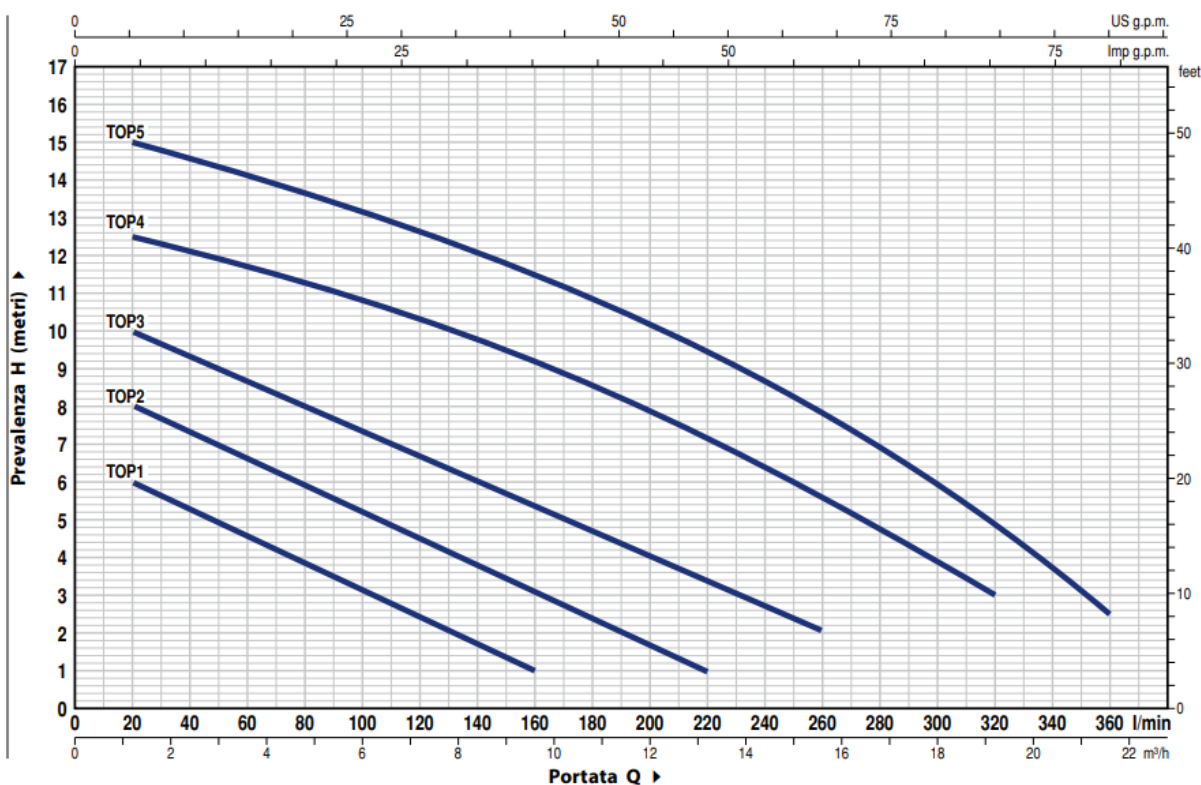

DATA SHEET

Engine Type	Single-phase
Liquid type	Clean water
Motor Power (HP)	0.50 HP

SPECIFIC REFERENCES

EAN13	8052230022088
-------	---------------

Condition New